



ALPHA
R A M P S



PYR SERIES MOBILE LOADING RAMP CATALOG





PYR-TW




Portable Yard Ramp-TW

FEATURES

- ✓ Accordingly to EN 1398 and ANSI+MH30.1-2015
- ✓ Have CE certification
- ✓ Capacity: 8-10-12-15-20 Ton
- ✓ Ability to load between 1000-1600 mm,
- ✓ PYR mobile ramps manual trailer hoist and down / up mechanism in fast and slow mode,
- ✓ 8-10-12 Ton capacity ramps have one pair trailer hoist, 15-20 Ton capacity ramps two pair trailer hoists
- ✓ With manual control hydraulic system for lifting front flaps
- ✓ Front flaps are 750 mm long and can be folded into two pieces,
- ✓ Front flaps are made of ST52 quality teardrop pattern sheet.
- ✓ 8-10-12 Ton capacity ramps have 12/13 mm thick front flaps and 15-20 Ton capacity ramps 22/23 mm thick front flaps.
- ✓ Length 11800mm,
- ✓ Platform internal width: 1900mm
- ✓ There are 350 mm high side protection barriers on both sides of the platform,
- ✓ Steel construction designed for load distribution,
- ✓ The product has swivel feet that adapt to the floor,
- ✓ To reposition the mobile loading ramp, heavy-duty wheels are available,
- ✓ SA2,5 quality sandblasting before painting.
- ✓ RAL 9005 and RAL 2004 epoxy first layer and acrylic finish layer.
- ✓ Designed to be maintenance-friendly, parts are interchangeable,
- ✓ Optional GALVANIZED



PYR - TW Portable Yard Ramp - TW

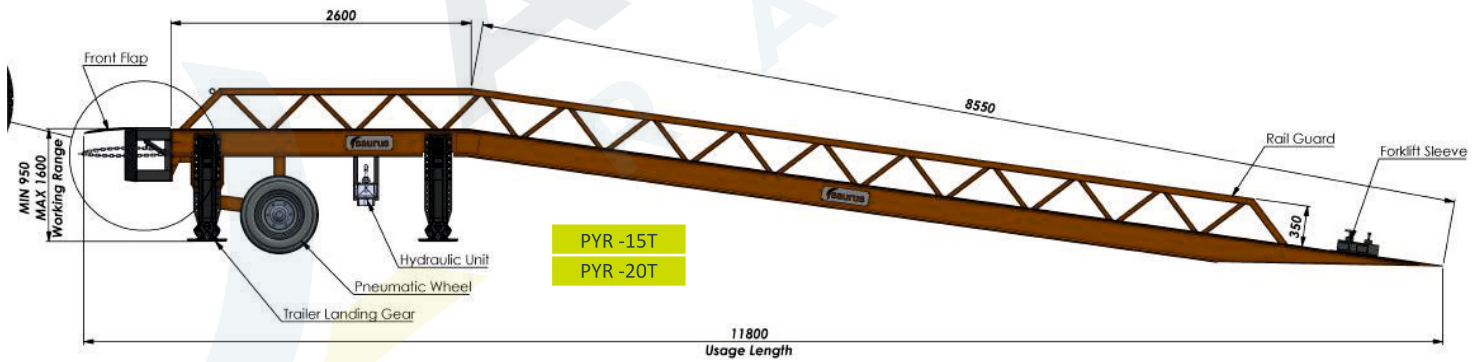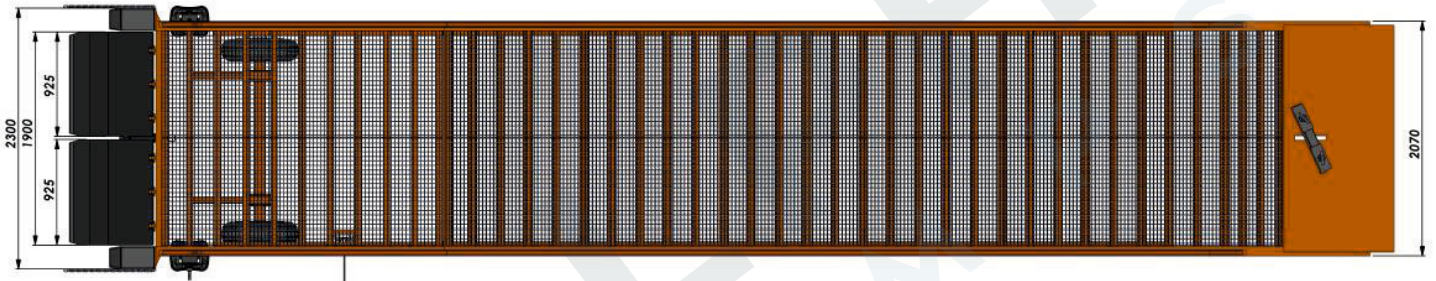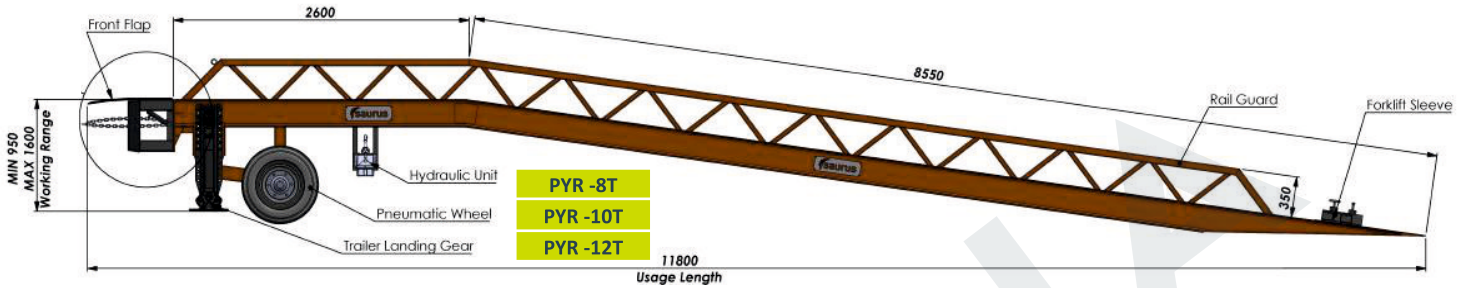

Model	Load Capacity	WIDTH (mm)		LENGTH (mm)	FLAP (mm)	HEIGHT (+mm)	
		Internal	External			Min	Max
PYR -8T	8 ton	1900	2000	11.800	750	950	1600
PYR -10T	10 ton	1900	2000	11.800	750	950	1600
PYR -12T	12 ton	1900	2000	11.800	750	950	1600
PYR -15T	15 ton	1900	2000	11.800	750	950	1600
PYR -20T	20 ton	1900	2000	11.800	750	950	1600



PYR – WH

Portable Yard Ramp – WH

FEATURES

- ✓ Accordingly to EN 1398 and ANSI+MH30.1-2015
- ✓ Have CE certification
- ✓ Capacity: 8-10-12-15-20 Ton
- ✓ Ability to load between 950-1600 mm,
- ✓ SA2,5 quality sandblasting before painting
- ✓ RAL 9005 and RAL 2004 epoxy first layer and acrylic finish layer
- ✓ Length: 11500 mm
- ✓ The platform surface is made of anti-slip St37 material, hot dipped galvanized, and 33 * 33 mm full fluted notched honeycomb,
- ✓ Platform internal width 2000 mm,
- ✓ On both sides of the platform, side protection barriers of 350 mm high are available ,
- ✓ Steel construction designed for load distribution,
- ✓ Adjustable security leg
- ✓ The product has a structural analysis report,
- ✓ The product has swivel feet that adapt to the floor,
- ✓ To reposition the mobile loading ramp, heavy-duty wheels are available,
- ✓ RAL 9005 and RAL 2004 epoxy first layer and acrylic finish layer.
- ✓ Designed to be maintenance-friendly, parts are interchangeable,
- ✓ Optional GALVANIZED



PYR - WH Portable Yard Ramp - WH

